

## FLUSH

---

Flush doors are simple door designs that have plain facings on both sides and are often kept deliberately simple in appearance to highlight other features nearby, or so as not to be intrusive

Portman 44mm thick flush doors have a solid graduated density chipboard core @ approx 28kg m<sup>2</sup>, and have a solid timber perimeter affixed on all four edges to better aid morticing and/or fitting of hardware.

Doors can be supplied primed ready for site painting or pre painted. Should the door have a timber veneer applied then the direction of the grain for the veneer can be either horizontal, as is usually the case with sliding doors or vertical to match other doors in the vicinity.


These doors have a flush (flat) surface without any decorative features, hence their name.

### FINISHES (see below)

White, primed, ash, cherry, maple, oak, walnut and sapele.

### + COMPATIBLE KITS

- Standard kits
- Architrave free kits
- Shadow gap
- Telescopic kits
- Fire rated | FD30 kits

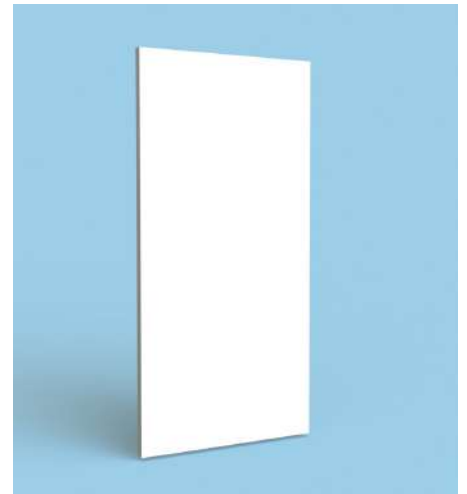


---


**Our design engineers are happy to work with you to create a bespoke door outside of our popular range. Manufacturing drawings are provided for sign off as standard.**

---

## FINISHES




White



Primed



Ash




Cherry



Maple



Oak



Walnut



Sapele

Veneered finishes are typically supplied with clear lacquer, 20% sheen. Veneered can be supplied as sand finish/unfinished for onsite colour matching and French polishing.

Other finishes are available, please contact sales office to discuss.

---

